

# PalTurn Pallet-inverter

## Model. Pallet-inverter SD



## PalTurn Pallet-inverter SD 2000-15 / 2400-15

PalTurn Pallet-inverter SD is a stationary pallet turner machine that runs to floor-level and is used to change pallets or for removing paper spacer or freezer spacer.

The pallet is fed into the machine using a pallet truck or pallet jack.

The machine can either rotate 90-degrees or 180-degrees depending on your needs. To remove paper spacer or freezer spacer, the machine is rotated from 0 to 90-degrees, pressure from the platforms is alleviated to allow for removal of spacers.

Changing pallets, either because of a defect pallet or swapping it to a plastic pallet, the new pallet is placed on top of the product, the platforms press down on the product, rotate 180-degrees, and the product is now standing on its new pallet. This does require manual pallet lifting, to place the new pallet on top – to avoid manual lifts a different type of pallet-inverter is recommended.


The pallet turner can be delivered with a variety of extra equipment and surface treatments.

### Specification.


<b>Lifting capacity</b>	<b>1500kg</b>
<b>Hight capacity Max.</b>	<b>Max.2000mm / 2400mm</b>
<b>Hight capacity Min.</b>	<b>Min. 200mm</b>
<b>Machine width</b>	<b>1600mm (2000-15) / 1800mm (2400-15)</b>
<b>Machine length</b>	<b>2200mm (2000-15) / 2400mm (2400-15)</b>
<b>Machine hight</b>	<b>2400mm (2000-15) / 2800mm (2400-15)</b>
<b>Platform dimension</b>	<b>1200mm x 1200mm</b>
<b>Palle dimensions</b>	<b>1200mm x 800mm, 1200mm x 1000mm, 1200mm x 1200mm</b>
<b>Machine weight</b>	<b>1300kg (2000-15) / 1600kg (2400-15)</b>
<b>Voltage</b>	<b>400V – 3 fazes</b>
<b>Rotation time 0-180 degree</b>	<b>20 sec.</b>
<b>Control manual (2-handed)</b>	<b>Push button</b>
<b>Control Automatic (semi)</b>	<b>Control panel HMI</b>
<b>Surface</b>	<b>Powder coated, standard colours</b>

### Ekstra Equipment.

- Automatic cycle incl. light curtain and safety fence
- Galvanised
- Stainless plates mounted towards the product (inner side plate)
- External start / pull string
- Light tower
- Special solutions / additions
- Spare parts package
- Service agreement

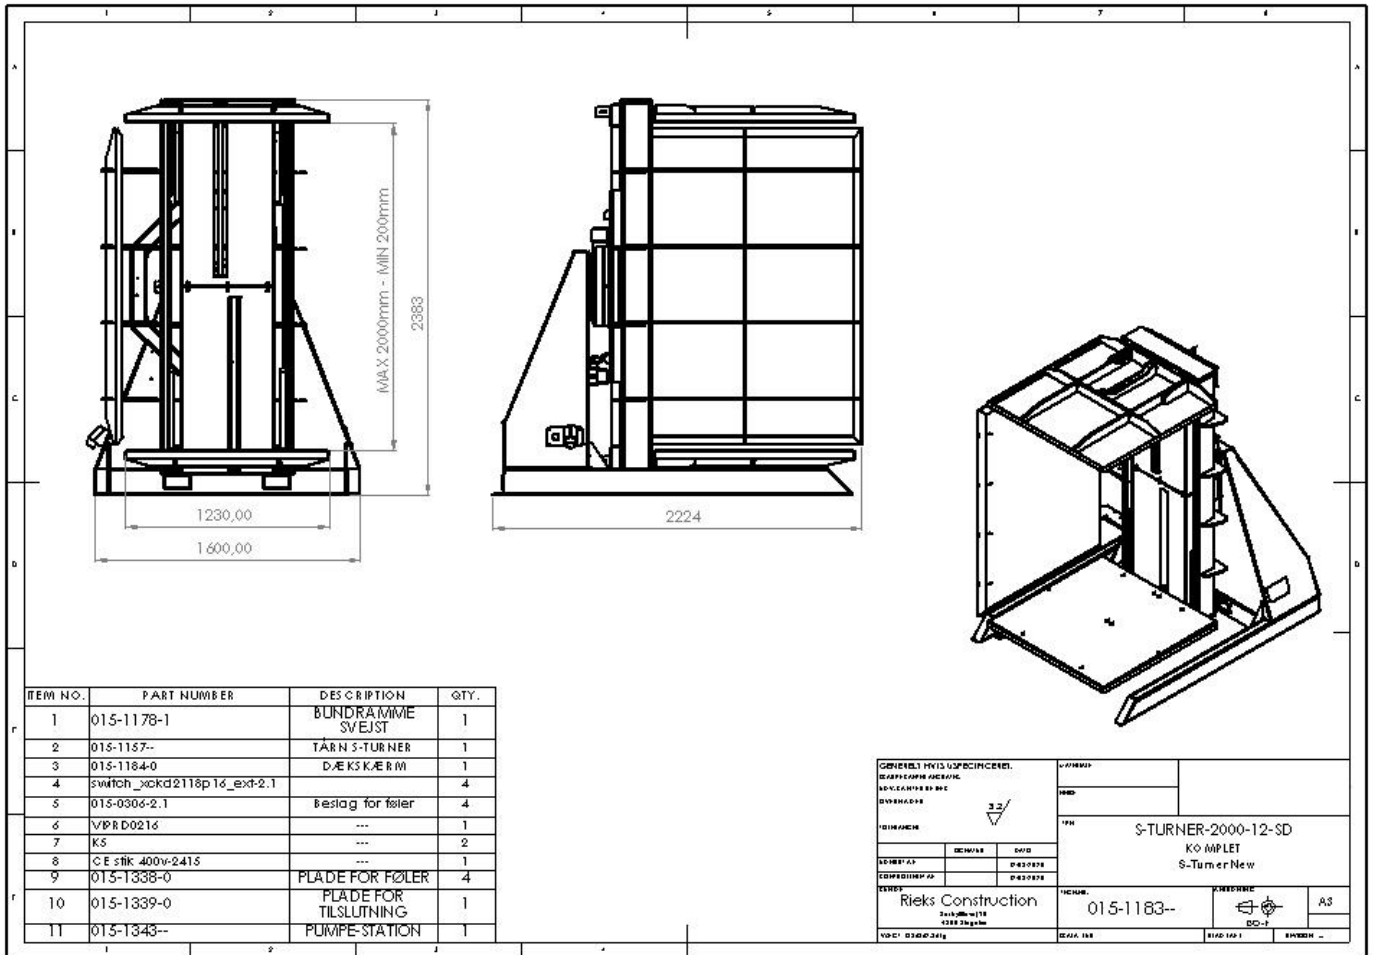

GENERELT HVIS USPECIFICERET: SKARPE KANTER AFRØJES HØJDELAGER OG ØVE OVERLAGER		3/2 	TOLERANCER: DEFINERT AF: LBP UDFØRTE AF: 10-03-2000 10-03-2000	MATERIAL: TEGN: 015-1183-- S-TURNER-2000-12-SD KOMPLET S-TurnerNew	RIEKS 	A3
RIEKS Construction Sølshøjvej 15 4288 Skjerve		015-1183--	015-1183--	015-1183--	A3	A3

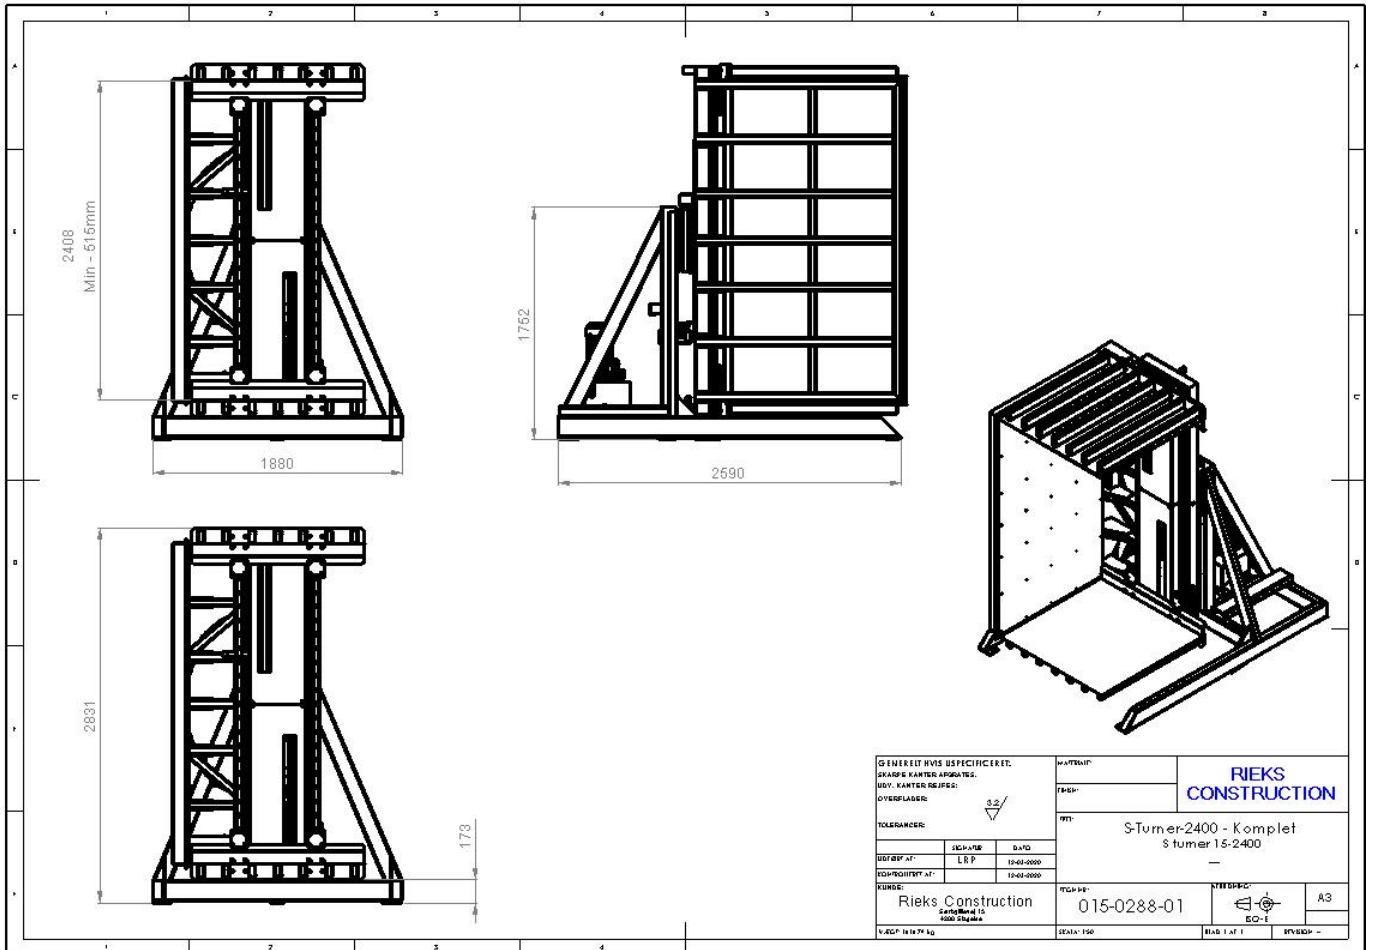

GENERELT HVIS USPECIFICERET: SKARPE KANTER AFRØJES HØJDELAGER OG ØVE OVERLAGER		3/2 	TOLERANCER: DEFINERT AF: LBP UDFØRTE AF: 10-03-2000 10-03-2000	MATERIAL: TEGN: 015-0288-01 S-Turner-2400 - Komplet S turner 15-2400	RIEKS 	A3
RIEKS Construction Sølshøjvej 15 4288 Skjerve		015-0288-01	015-0288-01	015-0288-01	A3	A3